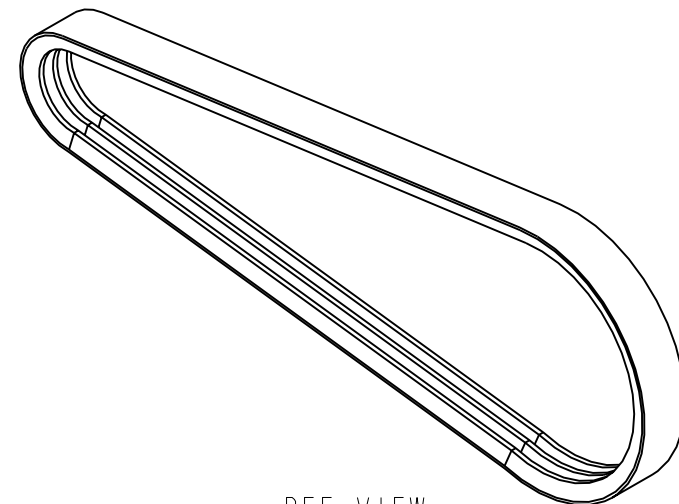


- (A1) 3B83
 86" EFFECTIVE LENGTH
 - BELT ANGLE: 40
 - CORD ADHESION RUBBER: SYNTHETIC RUBBER
 - CUSHION RUBBER: SYNTHETIC RUBBER
 - CORD: POLYESTER
 - TIE BAND: TRANSVERSE POLYESTER TIRE CORD

(A2) SOURCE:
 BESTORQ
 DRAWING NAME: 3/B83



OR EQUIVALENT



REF VIEW

NOTE: REFERENCE PART NUMBER 16559Z FOR MANUFACTURING PURPOSES

					DIM ARE IN INCHES DIM IN [] ARE IN MM UNITS IN [] ARE ISO METRIC EXCEPT AS NOTED				DWN P. CRONIN CHK REL		DATE 2-Nov-93		DWG. NO. 16559		
									TOLERANCES: X.XX± 0.03 X.XXX± 0.010 ANGLES± 1.0		TITLE: BELT, 3B83 BANDED				
					HARD TREAT										
A <2> WAS GATES HI-POWER					JTS		05-May-09		10002		NOTICE - CRARY IND. CLAIMS PROPRIETARY RIGHTS IN THE INFORMATION DISCLOSED ON THIS DRAWING. IT IS ISSUED IN CONFIDENCE FOR ENGINEERING INFORMATION ONLY AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN HEREON WITHOUT DIRECT WRITTEN PERMISSION FROM CRARY INDUSTRIES TO THE USER.				
A <1> REVISED NOTE					JTS		05-May-09		10002		ECO# 93-186 SCALE: 0.125 ESTIMATED WEIGHT: 6.5 LB. SIZE: A				
REV DESCRIPTION					CHG NOTICE		DATE		ECO#						

					DIM ARE IN INCHES DIM IN [] ARE IN MM UNITS IN [] ARE ISO METRIC EXCEPT AS NOTED		DWN P. CRONIN	DATE 05-May-09	DWG. NO. 16559
							CHK		
							REL		
					MAT'L		TOLERANCES:		TITLE: BELT, 3B83 BANDED
							X.XX± 0.03 X.XXX± 0.010 ANGLES± 1.0		
					HARD	TREAT			
							NOTICE - CRARY IND. CLAIMS PROPRIETARY RIGHTS IN THE INFORMATION DISCLOSED ON THIS DRAWING. IT IS ISSUED IN CONFIDENCE FOR ENGINEERING INFORMATION ONLY AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING SHOWN HEREON WITHOUT DIRECT WRITTEN PERMISSION FROM CRARY INDUSTRIES TO THE USER.		
REV	DESCRIPTION	CHG NOTICE	DATE	ECO#			ECO#	-	SCALE: 0.125
							ESTIMATED WEIGHT:	6.5 LB.	SIZE: A